

CBD15-Z

ELECTRIC STACKER 电动托盘堆垛车

LEAD ACID



产品性能特点: 整车简洁灵巧, 适合狭窄空间作业; 永磁驱动电机, 结构简单, 免维护; 动力强劲, 爬坡轻松; 标配急停开关、紧急反向安全装置及内置充电器; 多功能手柄, 集成钥匙开关, 标配直立行走按钮, 龟速按钮, 操作简单舒适; 金属罩壳, 高强度, 耐撞击。

CHARACTERISTICS: The whole vehicle is simple and agile, suitable for working in narrow spaces; Permanent magnet drive motor, simple structure, maintenance free; Strong power, easy climbing; Standard emergency stop switch, emergency reverse safety device, and built-in charger; Multi functional handle, integrated key switch, standard upright walking button, turtle speed button, easy and comfortable operation; Metal casing - high strength, impact resistant.



舒适·节能
COMFORT AND
ENERGY SAVING



稳定·可靠
STABLE AND
RELIABLE





智能·安全
INTELLIGENT
SECURITY



维修便捷
CONVENIENT
MAINTENANCE

特性	Feature	单位	
1.01 型号	Model		CBD15-Z
1.02 操作类型	Operating type		步行式 Walkie
1.03 额定载重	Load capacity	kg	1500
1.04 载荷中心距	Load center	mm	600
1.05 轴距	Wheel base	mm	1220
车轮			
Wheels			
2.01 轮子类型(前/后)	Wheels type		PU
2.02 驱动轮/承重轮数量	Wheel quantity Driving wheel/Bearing wheel		1/4
2.03 驱动轮尺寸	Driving wheel size	mm	Φ210×70
2.04 承重轮尺寸	Bearing wheel size	mm	Φ80×60
尺寸			
Dimension			
3.01 货叉最低离地高度	Min.fork lowered height	mm	80
3.02 货叉最大起升高度	Max.fork lifting height	mm	200
3.03 最大起升行程	Max.lifting height	mm	120
3.04 货叉外侧间距	Outside width between forks	mm	550/685
3.05 货叉内侧间距	Inside width between forks	mm	240/375
3.06 货叉长度	Fork length	mm	1150/1200
3.07 货叉宽度	Fork width	mm	155
3.08 货叉厚度	Fork thickness	mm	55
3.09 整车全长	Overall length	mm	1678/1628
3.10 车体宽度	Overall width	mm	685
3.11 整车高度(含手柄)	Overall height(With handle)	mm	1254
3.12 整车高度(不含手柄)	Overall height(Without handle)	mm	613
3.13 最小转弯半径	Min.Turning radius	mm	1388/1438
3.14 最小直角堆垛通道宽度(托盘800×1200, 1200沿货叉放置)	Min.Aisle width for pallets 800×1200	mm	1982
3.15 最小直角堆垛通道宽度(托盘1000×1200, 1200沿货叉放置)	Min.Aisle width for pallets 1000×1200	mm	2065
性能			
Performance			
4.01 最大行驶速度, 满载/空载	Travel speed,laden/unladen	km/h	4.2/4.7
4.02 最大起升速度, 满载/空载	Lift speed,laden/unladen	mm/s	31/40
4.03 最大下降速度, 满载/空载	Lowering speed,laden/unladen	mm/s	51/53
4.04 爬坡能力, 满载/空载	Gradeability,laden/unladen	%	6/16
电气配置			
Electrical configuration			
5.01 驱动电机/起升电机	Drive motor/ Lift motor	KW	DC0.75KW/DC0.6KW
5.02 蓄电池电压/容量	Battery voltage / capacity	V/Ah	24V/75Ah
5.03 蓄电池电压/容量	Charger specification	V/A	24V/8A
5.04 控制器型号	Controller		大能
重量			
Weight			
6.01 蓄电池重量	Battery weight	kg	2×10
6.02 自重(包含蓄电池)	Service weight with battery	kg	190
其他			
Others			
7.01 噪音水平	Noise level	dB(A)	≤70
7.02 转向类型	Steering type		机械转向 Mechanical
7.03 驱动类型	Drive control type		无刷直流

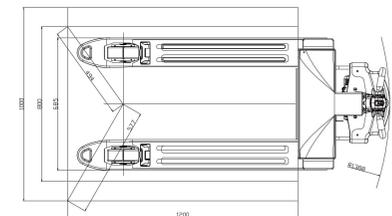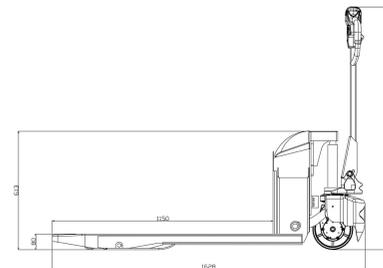

* 本公司保留更改产品设计和规格的权利, 恕不另行通知。
* Our products are subject to improvements and changes without notice.