

电动托盘搬运车

Electric Stackercarrier

电池
侧拉设计

驱动
浮动机构

电子
转向

弯道
减速

型号 / Model : CBD35-510/520/530

电动托盘搬运车 / Electric Pallet Truck



配置及性能:

1. 驱动单元专利设计浮动机构;
2. 电子助力转向, 轻便, 静音;
3. 交流驱动电机, 无碳刷, 免维护;
4. 电起升, 快速、高效, 标配起升限位装置;
5. 交流控制器, 无级调速, 动力强劲, 多重自动保护;
6. 弯道自动减速功能, 更安全;
7. 标配挡货架, 蓄电池双向侧拉设计;
8. 可选双托盘货叉或单托盘货叉。

Configuration and performance:

1. Drive unit floating bodies with patent design .
2. Electronic Power Steering , light and low noise .
3. AC driving motor without carbon brush and free maintenance .
4. Electric lifting , rapid , efficient , electricity limit switch is STD .
5. AC controller , stepless , strong power , multiple automatic protection .
6. Curve automatic deceleration function , safer .
7. Load backrest and side-way battery is STD .
8. Double or single pallet is option .

型号 / Model :

CBD35-510/520/530


电动托盘搬运车 / Electric Pallet Truck

特性 Feature				
型号 Model	—	CBD35	CBD35	CBD35
配置号 Configuration No.	—	510	520	530
额定载重 Load capacity	kg	3500		
适用托盘 Apply to pallet	mm	双托盘 Double pallet	单托盘 single pallet	
轴距 Wheel base	mm	2084	1569	1569
操作类型 Operating type	—	站驾式 Rider		步行式 walkie
车轮 Wheels				
轮子类型 (前/后) Wheels type	—	PU	PU	PU
驱动轮/平衡轮/承重轮数量 Wheel quantity Driving wheel/Balance wheel/Bearing wheel	—	1/4/2	1/4/2	1/4/2
驱动轮尺寸 Driving wheel size	mm	Φ300×120		
平衡轮尺寸 Balance wheel size	mm	Φ115×55		
承重轮尺寸 Bearing wheel size	mm	Φ82×152		
尺寸 Dimension				
货叉最低离地高度 Min. fork lowered height	mm	85		
货叉最大起升高度 Max. fork lifting height	mm	230		
最大起升行程 Max. lifting height	mm	145		
货叉外侧间距 Outside width between forks	mm	680		
货叉内侧间距 Inside width between forks	mm	180	220	
货叉长度 Fork length	mm	2432	1212/1365/1517	
货叉宽度 Fork width	mm	250	230	
货叉厚度 Fork thickness	mm	60		
整车全长 Overall length	mm	3605	2374	2222
车体宽度 Overall width	mm	930		
整车高度 (含手柄) Overall height (With handle)	mm	1536		
整车高度 (不含手柄) Overall height (Without handle)	mm	1280		
最小转弯半径 Min. turning radius	mm	2708	2190	2051
最小直角堆垛通道宽度 (托盘1200×1200) Min. aisle width for pallets 1200×1200	mm	3650	2536	2365
性能 Performance				
最大行驶速度, 满载/空载 Travel speed, laden/unladen	km/h	11/12		4/4.5
最大起升速度, 满载/空载 Lift speed, laden/unladen	mm/s	35/40		
最大下降速度, 满载/空载 Lowering speed, laden/unladen	mm/s	35/30		
爬坡度, 满载/空载 Gradeability, laden/unladen	%	5/12		5/10
电气配置 Electrical configuration				
驱动电机/起升电机/转向电机 Drive motor/Lift motor/Steering motor	kW	AC4. 2/DC2. 2/DC0. 15		AC1. 5/DC2. 2/DC0. 15
蓄电池电压/容量 Battery voltage/capacity	V/Ah	24/360		
制动 Brake	—	电磁/再生 Electromagnetic/Regenerative		
控制器型号 Controller	—	ZAPI		ZAPI
重量 Weight				
蓄电池重量 Battery weight	kg	302		
自重 (包含蓄电池) Service weight with battery	kg	1146	1038	910

*本公司保留更改产品设计和规格的权利, 恕不另行通知。

选配:

- ◎ FAAM 330/490Ah容量蓄电池;

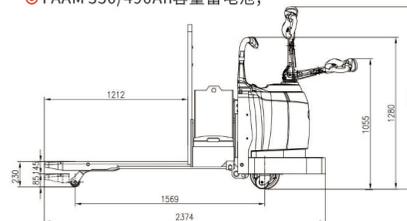

OPTIONS:

- ◎ FAAM 330/490Ah battery capacity.

