

CDD16 /20-TF



ELECTRIC STACKER 电动托盘堆垛车




产品性能特点: 高强度货叉; 标配内置充电器; 起升自动限位, 长寿命限位开关; 永磁无刷驱动电机, 免维护, 效力高; 标配紧急开关和紧急反向安全装置; 中置机械转向, 标配保护臂、折叠踏板, 操作便利。

CHARACTERISTICS: High strength forks; Automatic ring limit, limit switch, on/off; Built-in charger is standard; Permanent magnet brushless drive motor, maintenance-free, high efficiency, long life; Standard configuration emergency stop switch and emergency reverse device ensure truck safety; Mid mounted mechanical steering, standard with protective arm and folding pedal, easy to operate.

特性	Feature	单位	CDD16-TF	CDD20-TF
1.1 型号	Model		CDD16-TF	CDD20-TF
1.2 操作类型	Operating type		站驾式 Stand on	站驾式 Stand on
1.3 额定载重	Load capacity	kg	1600	2000
1.4 载荷中心距	Load center	mm	600	600
1.5 轴距	Wheel base	mm	1145	1145
车轮				
2.1 轮子类型(前/后)	Wheels type		PU	PU
2.2 驱动轮/平衡轮/承重轮数量	Wheel quantity		1/2/4	1/2/4
2.3 驱动轮尺寸	Driving wheel size	mm	Φ195×70	Φ195×70
2.4 平衡轮尺寸	Balance wheel size	mm	Φ116×55	Φ116×55
2.5 承重轮尺寸	Bearing wheel size	mm	Φ73×60	Φ73×60
尺寸				
3.1 标准门架起升高度	Standard lift height	mm	2500/3000/3500/4000	2500/3000/3500/4000
3.2 门架作业时整车最大高度	Max extend height	mm	2972/3472/3972/4472	2972/3472/3972/4472
3.3 门架缩回时整车静态高度	Mast lowered height	mm	1762/2012/2262/2512	1762/2012/2262/2512
3.4 货叉最低离地高度	Min.fork lowered height	mm	80	80
3.5 货叉外侧间距	Outside width between forks	mm	550/600/650/685	550/600/650/685
3.6 货叉内侧间距	Inside width between forks	mm	180/230/280/315	180/230/280/315
3.7 标准货叉规格	Fork size (length/width)	mm	1150/185/60	1150/185/60
3.8 整车全长(踏板放下/踏板收起)	Overall length	mm	2214/1812	2214/1812
3.9 车体宽度	Overall width	mm	780	780
3.10 最小转弯半径	Min.Turning radius	mm	1393	1393
3.11 最小直角堆垛通道宽度(托盘800×1200, 1200沿货叉放置)	Min.Aisle width for pallets 800×1200	mm	2224	2224
3.12 最小直角堆垛通道宽度(托盘1000×1200, 1200沿货叉放置)	Min.Aisle width for pallets 1000×1200	mm	2291	2291
性能				
4.1 最大行驶速度, 满载/空载	Travel speed, laden/unladen	km/h	4.2/5	4.2/5
4.2 最大起升速度, 满载/空载	Lift speed, laden/unladen	mm/s	85/155	105/175
4.3 最大下降速度, 满载/空载	Lowering speed, laden/unladen	mm/s	144/104	115/110
4.4 爬坡能力, 满载/空载	Gradeability, laden/unladen	%	6/10	6/10
电气配置				
5.1 驱动电机/起升电机	Drive motor/ Lift motor		BLDC1.0/DC1.2	BLDC1.2/DC1.2
5.2 蓄电池电压/容量	Battery voltage / capacity	V/Ah	48/65	48/65
5.3 充电器规格	Charger specification	V/Ah	48/8	48/8
5.4 控制器型号	Controller		HELI(合力)	HELI(合力)
5.5 制动	Brake		电磁/再生 Electromagnetic/Regenerative	
重量				
6.1 蓄电池重量	Battery weight		15×4	15×4
6.2 自重(包含蓄电池)	Service weight with battery		710	725
其他				
7.1 转向类型	Steering type		机械转向 Mechanical	机械转向 Mechanical

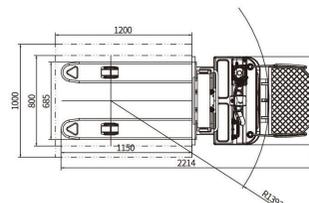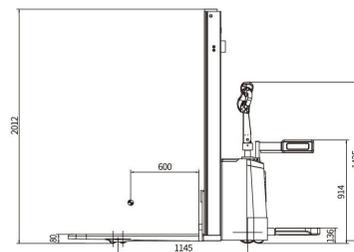

载荷曲线图 Load curve

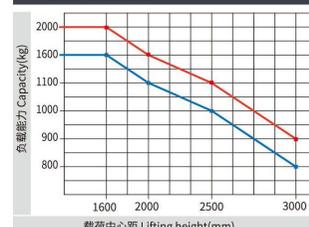

● CDD16-TF ● CDD20-TF